


מד מהירות וכיוון רוח

 <p>מד הרוח</p>	<p>דגם: NO-357</p> <p>מפרט:</p> <ul style="list-style-type: none"> - מד מהירות + כיוון רוח - תוצרת אנגליה - מתח 9-15 V-DC - דיוק מהירות: 5% או - דיוק כיוון: ±10 מעלות - כבל ניתן להארכה - יציאות 4-20mA
	<p>WIND SPEED</p> <p>Typical accuracy 5% or 1.5 m/s</p> <p>Resolution better than 0.5 m/s</p> <p>Threshold <0.5 m/s</p> <p>WIND DIRECTION</p> <p>Accuracy +/- 5 degs. typical (+/- 10 degs. worst case)</p> <p>Resolution Generally < 1 deg. (+/- 10 degs. at North)</p> <p>Threshold <0.5 m/s</p>

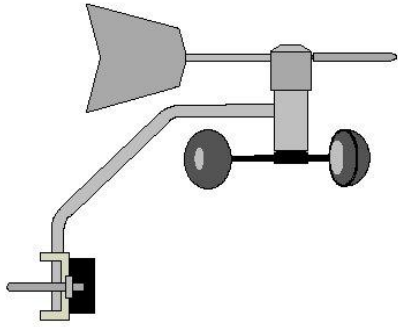

The combined Wind Speed and Direction Sensors are manufactured from anodized aluminium alloy, PVC and stainless steel with moulded polypropylene cups. The units are lightweight (less than 250 grams) yet very robust.

The sensors are designed to be mounted to a mast of between 30 - 50 mm diameter by means of a V-shaped clamp and bracket. This allows simple orientation to North using the compass provided; the only setting up required.

Wind Direction is sensed by a precision conductive potentiometer which combines exceptionally long life with high sensitivity.

Wind Speed is derived from a Hall Effect solid state magnetic switch activated by magnets in the cup rotor running in precision stainless steel ball race (Pro) or sintered bronze bearing (Basic) giving very high sensitivity and very long life.

Specification

WIND SPEED

Typical accuracy 5% or 1.5 m/s
Resolution better than 0.5 m/s
Threshold <0.5 m/s

WIND DIRECTION

Accuracy +/- 5 degs. typical (+/- 10 degs. worst case)
Resolution Generally < 1 deg. (+/- 10 degs. at North)
Threshold <0.5 m/s

